



NC76 Downlight



NC76 Mini down light NC76 is specially designed for European market with standard cutout size of 83mm. 15°/24°/36°/60° beam angle are provided. Combined of COB LED and PC reflector. 25 degree flexible rotary head makes installation easier and better. CRI80/90/97 optional, dim to warm is available.

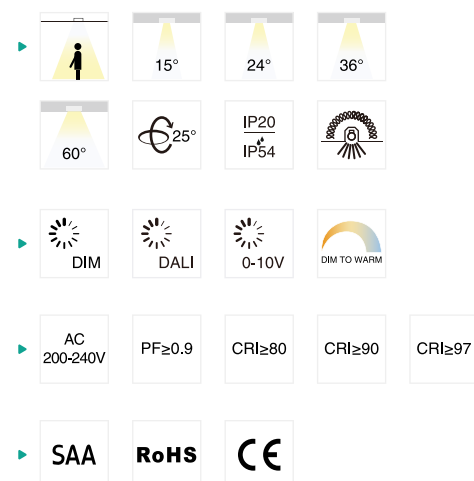


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NC76-3-7W-D	7W	Ø95x55	Ø82-88	560lm	0.40	24PCS
NC76-3-10W-D	10W	Ø95x55	Ø82-88	740lm	0.40	24PCS
NC76-3-7W-DW	7W	Ø95x55	Ø82-88	500lm	0.40	24PCS
NC76-3-10W-DW	10W	Ø95x55	Ø82-88	700lm	0.40	24PCS

CCT — 2700K 3000K 4000K 5000K


Trim — White Black Silver Nickel Brushed



NC76B Downlight

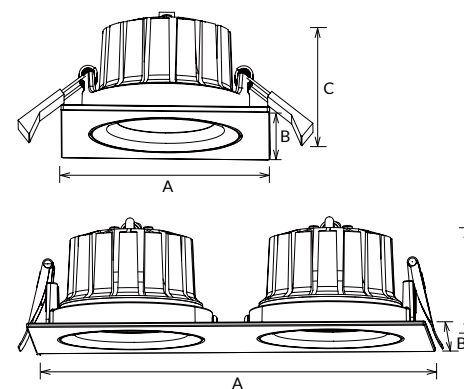

NC76B is a square COB LED downlight with aluminum die-casting housing. It could be tilted 25 degree, 15°/24°/36°/60° beam angle for selection. Dim to warm(2000K~3000K) and flicker free external driver are available.

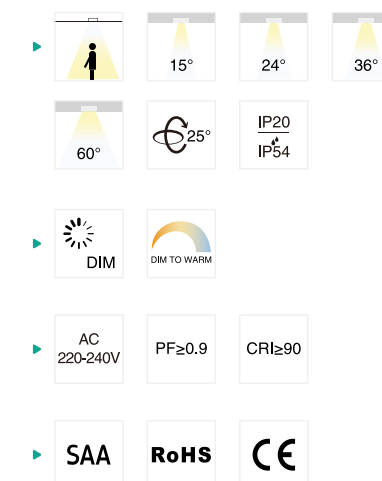

Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NC76B-3-10W	10W	95x95x55	Ø82-88	770lm	0.34	48PCS
NC76B-20W	20W	190x95x55	182x85	1850lm	0.50	24PCS

CCT — 2700K 3000K 4000K 5000K

Trim — White Black Silver Nickel Brushed