





NC78 Downlight




NC78 Mini down light NC78 with 24°/36°/60° beam angle is applicable for various lighting effects. With IP54 waterproof design, it is the ideal for damp locations. 25 degree flexible rotary head makes installation easier and better. CRI80/90/97 optional, dim to warm is available.

-
-
-
-

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NC78-2.5-5W	5W	Ø80x50	Ø68-74	450lm	0.27	48PCS
NC78-2.5-8W	8W	Ø80x50	Ø68-74	600lm	0.27	48PCS
NC78-2.5-8W-P	8W	Ø80x50	Ø68-74	400lm	0.27	48PCS

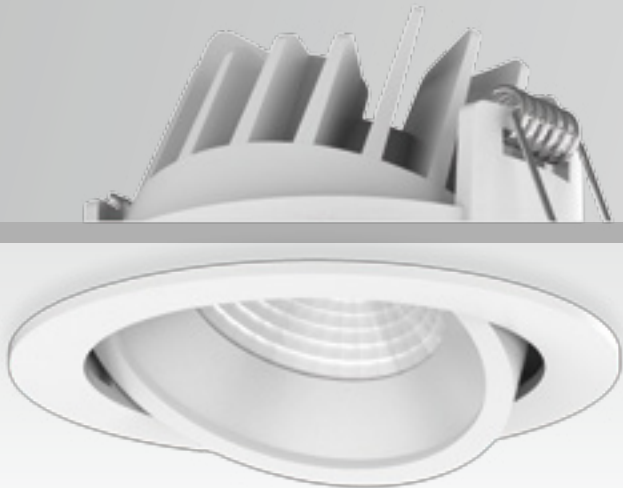

NC79 Downlight



Mini down light NC79 achieves 100lm/W high efficiency with super high lumen COB and excellent light transmittance prismatic lens. It has 22° vertically adjustable lighting directions. External driver makes easier maintenance.

-
-
-
-

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NC79-2.5-10W	10W	Ø90x46	Ø84	1010lm	0.26	48PCS