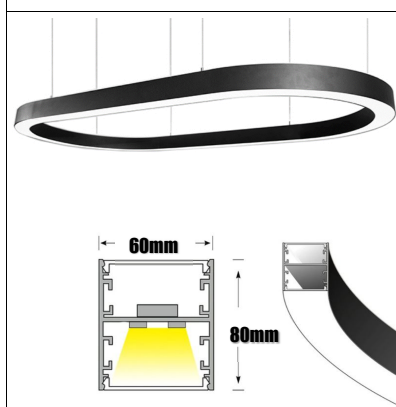


Aluminium Profile Oval LED Pendant Light


Product Parameters	
Input Voltage	: AC100-277V / AC220-240V,50-60HZ
Material	: 6063 Aluminium Profile + Opal Diffuser
LED Chip	: SANAN SMD2835
Driver Brand	: Lifud / BOKE
CCT	: 3000K / 4000K / 6000K / 3000-6000K Tunable
Luminous Flux	: 100-110Lm/W
CRI	: >80Ra
PF	: >0.90
UGR	: <19
Flicker Free	: Yes
Beam Angle	: 120°
Function Option	: ON&OFF / 0-10V / DALI / Triac
Installation Option	: Suspension / Ceiling surface / Recessed Mount
Finish Color	: Black / White (Customized available Gold / Silver / Red / Blue / Green / Yellow etc)
IP Grade	: IP20
Warranty	: 5 years

Width: 60mm;Height: 80mm


	Model	Watt	Lumens	CCT	Size	Dimming Type	Finish Color
	NL6080-F-450/1300	50W	5000Lm	3000K/4000K/6000K	L1300*W450*H80mm	Non dimming	Black / White
	NL6080-F-660/1800	80W	8000Lm	3000K/4000K/6000K	L1800*W660*H80mm	Non dimming	Black / White
	NL6080-F-780/2200	100W	10000Lm	3000K/4000K/6000K	L2200*W780*H80mm	Non dimming	Black / White
	NL6080-F-900/2700	120W	12000Lm	3000K/4000K/6000K	L2700*W900*H80mm	Non dimming	Black / White
	NL6080-F-1060/3000	140W	14000Lm	3000K/4000K/6000K	L3000*W1060*H80mm	Non dimming	Black / White
	NL6080-F-1200/3600	160W	16000Lm	3000K/4000K/6000K	L3600*W1200*H80mm	Non dimming	Black / White
	NL6080-F-1560/3600	180W	18000Lm	3000K/4000K/6000K	L3600*W1560*H80mm	Non dimming	Black / White
	NL6080-F-1560/4800	230W	23000Lm	3000K/4000K/6000K	L4800*W1560*H80mm	Non dimming	Black / White
	NL6080-F-1860/4800	240W	24000Lm	3000K/4000K/6000K	L4800*W1860*H80mm	Non dimming	Black / White
	NL6080-F-2060/5400	260W	26000Lm	3000K/4000K/6000K	L5400*W2060*H80mm	Non dimming	Black / White
	NL6080-F-2060/6000	290W	29000Lm	3000K/4000K/6000K	L6000*W2060*H80mm	Non dimming	Black / White
	NL6080-F-2460/6000	300W	30000Lm	3000K/4000K/6000K	L6000*W2460*H80mm	Non dimming	Black / White
	NL6080-F-2460/7000	330W	33000Lm	3000K/4000K/6000K	L7000*W2460*H80mm	Non dimming	Black / White

Finish Color Option

*Our standard finish color is black and white.
*Customized available gold,silver,red,green,blue,etc.

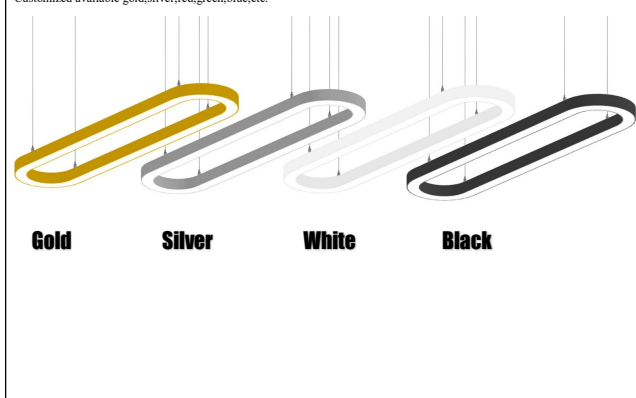

Structure Drawg

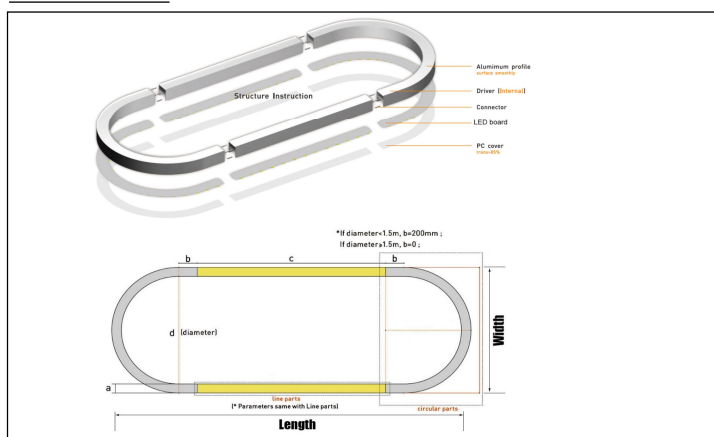

نورعمان



NOOROMAN

Application

- 1.Hospital, Gym, Theater, Cinema,Exhibition Hall,Museum,Video Game Room.
- 2.Hotel,Restaurant,Supermarket,Station,Airport,Cafe Shop,Bar,Club.
- 3.Living Room,Bedroom,Conference Room,Office,Corridor,Lobby,etc.



نورعمان



NOOROMAN

TECHNICAL ENGINEERING SERVICES L.L.C.

Technical Engineering Services L.L.C.

P.O. Box 81, Postal Code 124, Rusayl, Sultanate of Oman.Tel.: +968 24446462, Fax: +968 24446463, E-mail: tesone@omantel.net.om