



Datasheet for S shape LED Linear Light

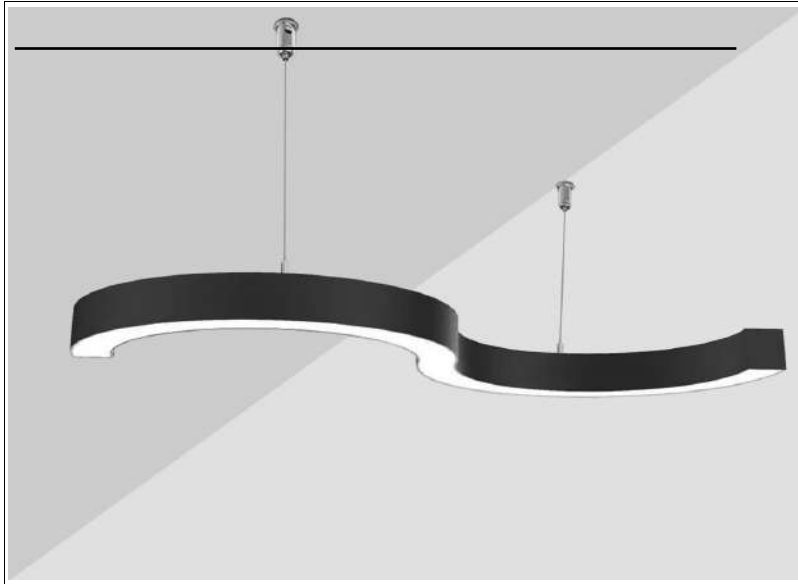


Specification

- *Input voltage : AC220~240V/AC100~277V,50/60HZ
- *Material : 6063 extruded aluminium profile + PMMA diffuser
- *LED chip : SMD2835
- *Driver : Constant current LED driver
- *Dimming option :Non dimming / 0-10V dimming / DALI dimming
- *Color Temperature : 3000K / 4000K / 6000K
- *Beam angle : 120°
- *Power factor : >0.95
- *CRI : >80Ra
- *UGR : <19
- *Flicker free: Yes
- *Aluminium finish : Black / White / Silver / Golden
- *Installation method : Suspension / Ceiling surface / Recessed
- *Installation accessories : include



Product size

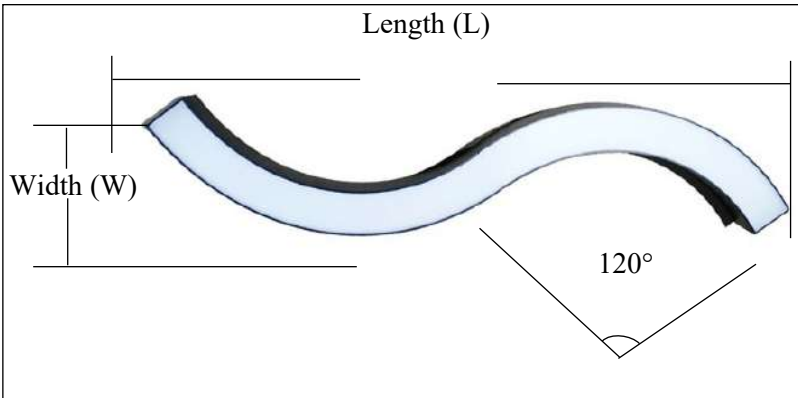



Aluminium section size

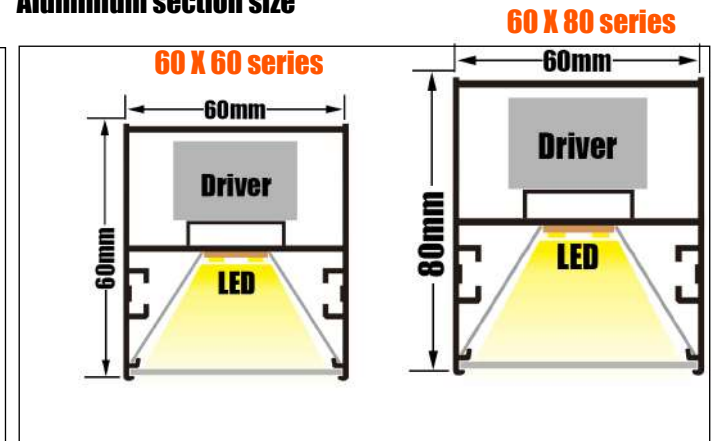


Structure

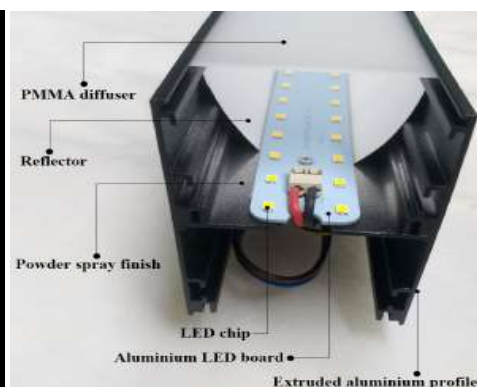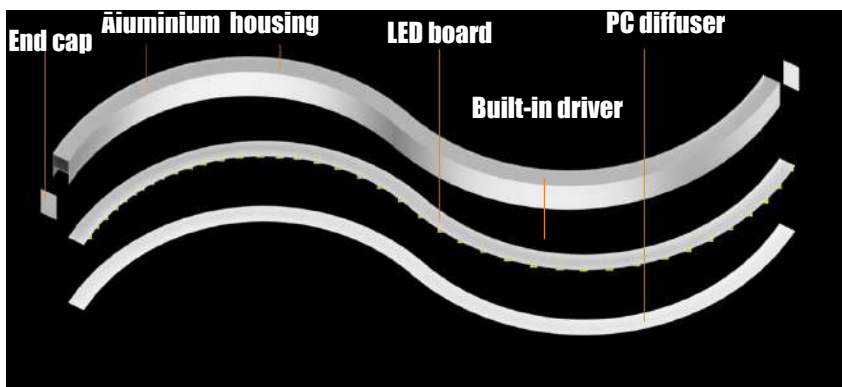

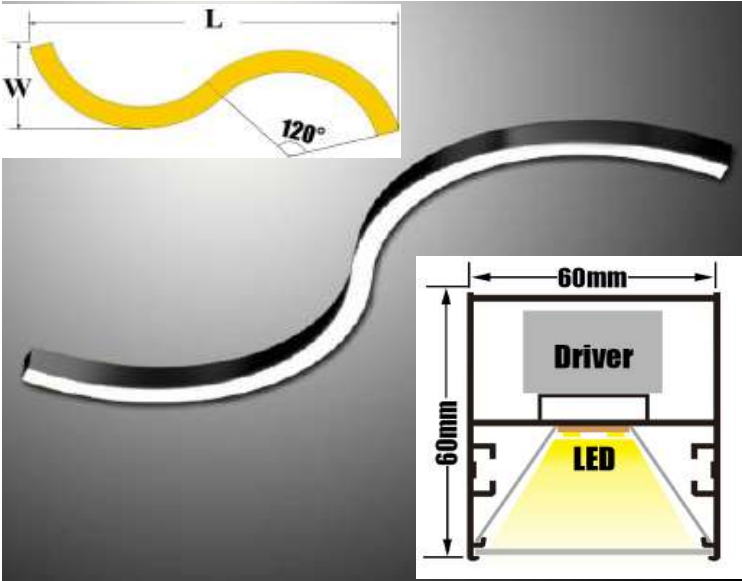W60*H60 series	Model	Power	Lumens	Size	Part Quantity
	NLS6060-S1	10W	1000Lm	L890*W235mm	1 part
	NLS6060-S2	15W	1500Lm	L1230*W306mm	2 parts
	NLS6060-S3	20W	2000Lm	L1455*W355mm	2 parts
	NLS6060-S4	30W	3000Lm	L1655*W395mm	2 parts
	NLS6060-S5	40W	4000Lm	L2160*W500mm	2 parts
	NLS6060-S6	50W	5000Lm	L2590*W590mm	2 parts
	NLS6060-S7	60W	6000Lm	L2870*W645mm	2 parts
	NLS6060-S8	75W	7500Lm	L3435*W765mm	2 parts
	NLS6060-S9	120W	12000Lm	L5250*W1560mm	4 parts
	NLS6060-S10	140W	14000Lm	L5700*W1230mm	4 parts
	NLS6060-S11	160W	16000Lm	L7115*W1525mm	4 parts
	NLS6060-S12	180W	18000Lm	L8525*W1815mm	6 parts
	NLS6060-S13	240W	24000Lm	L9940*W2110mm	6 parts

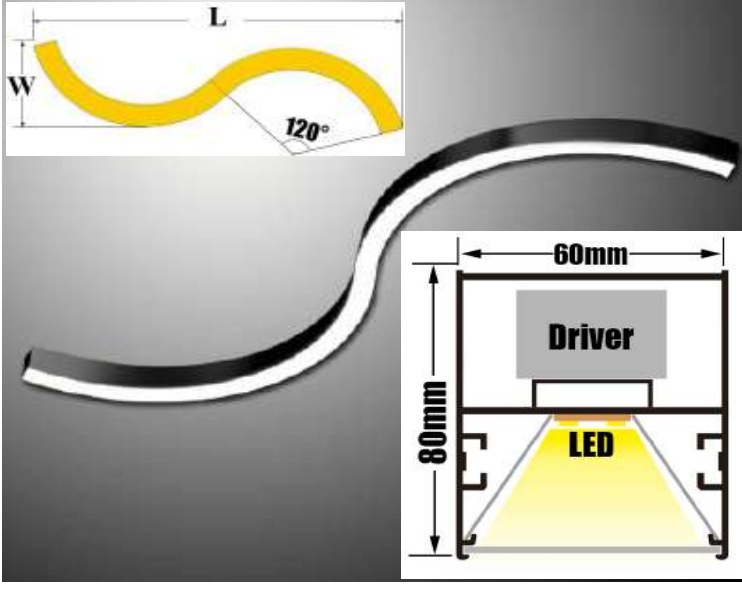W60*H80 series	Model	Power	Lumens	Size	Part Quantity
	NLS6080-S1	10W	1000Lm	L890*W235mm	1 part
	NLS6080-S2	15W	1500Lm	L1230*W306mm	2 parts
	NLS6080-S3	20W	2000Lm	L1455*W355mm	2 parts
	NLS6080-S4	30W	3000Lm	L1655*W395mm	2 parts
	NLS6080-S5	40W	4000Lm	L2160*W500mm	2 parts
	NLS6080-S6	50W	5000Lm	L2590*W590mm	2 parts
	NLS6080-S7	60W	6000Lm	L2870*W645mm	2 parts
	NLS6080-S8	75W	7500Lm	L3435*W765mm	2 parts
	NLS6080-S9	120W	12000Lm	L5250*W1560mm	4 parts
	NLS6080-S10	140W	14000Lm	L5700*W1230mm	4 parts
	NLS6080-S11	160W	16000Lm	L7115*W1525mm	4 parts
	NLS6080-S12	180W	18000Lm	L8525*W1815mm	6 parts
	NLS6080-S13	240W	24000Lm	L9940*W2110mm	6 parts

Shell Color Option

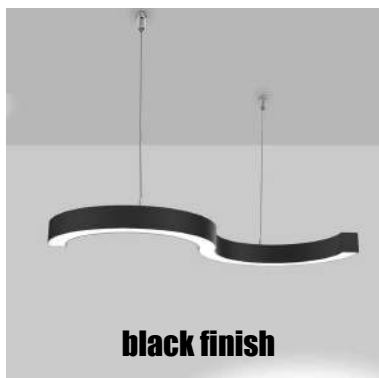

Installation Option

- 1.Suspension mounting
- 2.Ceiling Surface mounting or wall mounting
- 3.Recessed mounting



Application

- Hall, Offices, Hospitals, Supermarket, Hotel, Mall, Shop, Club.
- Entrance Areas ,Receptions, Meeting rooms.
- Corridors , Circulation Areas.

