




نور عمان

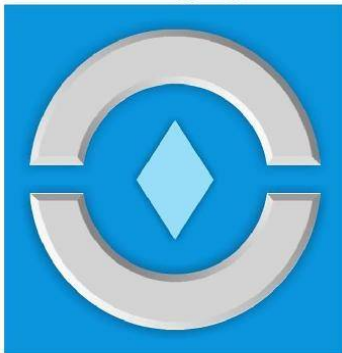


**NOOROMAN**


Landscape  
Recessed Wall Light




|                              |  |
|------------------------------|--|
| <b>ITEM</b>                  |  |
| NBA1517                      |  |
| <b>LIGHT SOURCE</b>          |  |
| 15×0.2W NICHIA               |  |
| <b>INPUT VOLTAGE(V)</b>      |  |
| DC 24 120 240                |  |
| <b>OPERATING CURRENT(MA)</b> |  |
| DC 24=200 120=47 240=29      |  |
| <b>CONSUMPTION(W)</b>        |  |
| DC 24=4.8 120=5.5 240=5.7    |  |
| <b>LUMINANCE(LM)</b>         |  |
| CW=113 WW=104                |  |
| <b>IK</b>                    |  |
| 10                           |  |



|                              |  |
|------------------------------|--|
| <b>ITEM</b>                  |  |
| NBB5407                      |  |
| <b>LIGHT SOURCE</b>          |  |
| 54×0.07W NICHIA              |  |
| <b>INPUT VOLTAGE(V)</b>      |  |
| DC 24 120 240                |  |
| <b>OPERATING CURRENT(MA)</b> |  |
| DC 24=200 120=55 240=30      |  |
| <b>CONSUMPTION(W)</b>        |  |
| DC 24=5.3 120=5.9 240=6.1    |  |
| <b>LUMINANCE(LM)</b>         |  |
| CW=47 WW=44                  |  |
| <b>IK</b>                    |  |
| 10                           |  |




|                              |  |
|------------------------------|--|
| <b>ITEM</b>                  |  |
| NBC5407                      |  |
| <b>LIGHT SOURCE</b>          |  |
| 54×0.07W NICHIA              |  |
| <b>INPUT VOLTAGE(V)</b>      |  |
| DC 24 120 240                |  |
| <b>OPERATING CURRENT(MA)</b> |  |
| DC 24=220 120=55 240=30      |  |
| <b>CONSUMPTION(W)</b>        |  |
| DC 24=5.3 120=5.9 240=6.1    |  |
| <b>LUMINANCE(LM)</b>         |  |
| CW=150 WW=130                |  |
| <b>IK</b>                    |  |
| 09                           |  |



RECESSED SLEEVE(Included)



074#



|                       |                                                                                                          |
|-----------------------|----------------------------------------------------------------------------------------------------------|
| FRONT COVER           | NBA1517 / NBB5407: 12# Die-casting aluminum<br>NBC5407: Made by hard chrome-plated stainless steel 316L# |
| HOUSING               | 12# Die-casting RAL9005 powder coated aluminum<br>T=60-80μm. Adhesion of ISO class 1/ASTM class 4B       |
| LIGHT WINDOW          | UVstop & Fireproof PC T=1.5mm: NBA1517<br>UVstop & Fireproof PC T=3mm: NBC5407, NBB5407                  |
| CABLE GLAND           | IP68 PG-9 PA66                                                                                           |
| GASKET                | Molding shaped silicone seal                                                                             |
| RECESSED SLEEVE       | PC/ABS ALLOYS 074#                                                                                       |
| LED DRIVER            | Constant Voltage Input, Constant Current Output                                                          |
| OPERATING TEMPERATURE | -20°C~40°C                                                                                               |
| POWER CABLE           | Outside of luminaire<br>H05RN-F 2×1.0mm², L=0.5m(12V/24V)<br>H05RN-F 3×1.0mm², L=0.5m(120V/240V)         |
| IP                    | IP65                                                                                                     |
| DIMMING SUPPORT       | Triac PWM Available<br>1-10V Dali Customized                                                             |

#### REGULAR PAINTING COLOR

Basic

Dark Grey  
KAP 7037

Secondary


Silver Grey  
KAP 9022

Sanded Black  
RAL 9005




#### MOUNTING SLEEVE CHARACTERISTIC






- The above picture – the supporting plate “●” and “●” are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate “●” and “●” from the mountingsleeve before the lamp installation.

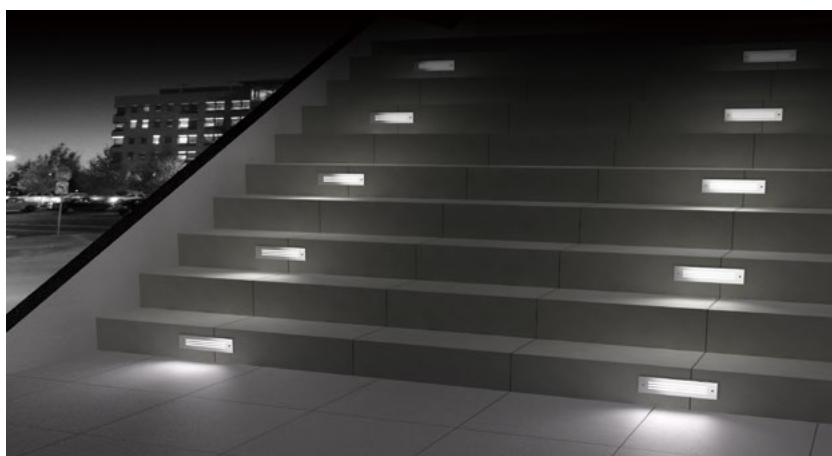



#### PHOTOMETRIC

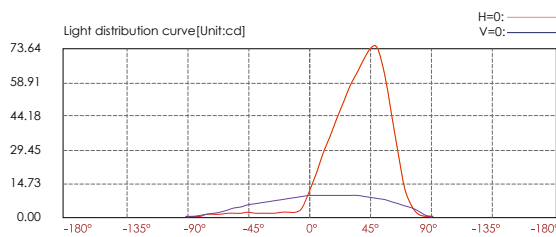

| Illuminance at a distance |              |                   |  |
|---------------------------|--------------|-------------------|--|
| Center beam LUX           | Beam width V | H                 |  |
| 2m 3.28 LUX               | 4.30m        | 1.70m             |  |
| 4m 0.82 LUX               | 8.60m        | 3.40m             |  |
| 6m 0.36 LUX               | 12.9m        | 5.10m             |  |
| 8m 0.20 LUX               | 17.2m        | 6.90m             |  |
| 10m 0.13 LUX              | 21.4m        | 8.60m             |  |
| 12m 0.09 LUX              | 25.7m        | 10.3m             |  |
| Ver.Spread:94.1           |              | Horiz.Spread:46.5 |  |

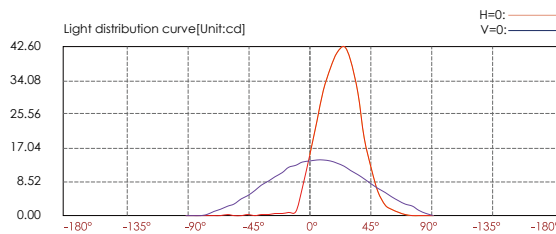

| Illuminance at a distance |              |                   |  |
|---------------------------|--------------|-------------------|--|
| Center beam LUX           | Beam width V | H                 |  |
| 2m 3.84 LUX               | 3.20m        | 1.4m              |  |
| 4m 0.96 LUX               | 6.40m        | 2.9m              |  |
| 6m 0.43 LUX               | 9.70m        | 4.3m              |  |
| 8m 0.24 LUX               | 12.9m        | 5.7m              |  |
| 10m 0.15 LUX              | 16.1m        | 7.1m              |  |
| 12m 0.11 LUX              | 19.3m        | 8.6m              |  |
| Ver.Spread:77.8           |              | Horiz.Spread:39.3 |  |

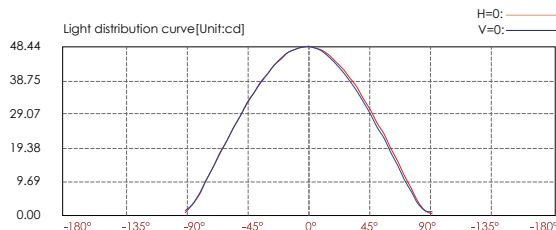

| Illuminance at a distance |              |                    |  |
|---------------------------|--------------|--------------------|--|
| Center beam LUX           | Beam width V | H                  |  |
| 2m 12.08 LUX              | 5.60m        | 5.50m              |  |
| 4m 3.02 LUX               | 11.3m        | 11.0m              |  |
| 6m 1.34 LUX               | 16.9m        | 16.5m              |  |
| 8m 0.76 LUX               | 22.6m        | 22.0m              |  |
| 10m 0.48 LUX              | 28.2m        | 27.5m              |  |
| 12m 0.34 LUX              | 33.9m        | 33.0m              |  |
| Ver.Spread:109.4          |              | Horiz.Spread:107.9 |  |