



نور عمان




NOOROMAN

High Luminance
LED Inground Light


Asymmetrical
Power LED Inground Light




ITEM	NCDR0357
LIGHT SOURCE	3×2W
LENS	FC02
SELECTED DEGREE(°)Ø1/2	45°/35°
INPUT VOLTAGE(V)	DC 24 120 240
OPERATING CURRENT(MA)	DC 24=206 120=51 240=30
CONSUMPTION(W)	DC 24=5.2 120=6.0 240=6.0
LUMINANCE(LM)	CW=398 WW=359
IK	08



ITEM	NBFR0657
LIGHT SOURCE	6×2W
LENS	FC04
SELECTED DEGREE(°)Ø1/2	45°/35°
INPUT VOLTAGE(V)	DC 24 120 240
OPERATING CURRENT(MA)	DC 24=560 120=100 240=56
CONSUMPTION(W)	DC 24=13.5 120=11.8 240=12.4
LUMINANCE(LM)	CW=944 WW=880
IK	07



ITEM	NVAR0658
LIGHT SOURCE	6×3W
LENS	FC04
SELECTED DEGREE(°)Ø1/2	45°/35°
INPUT VOLTAGE(V)	DC 24 120 240
OPERATING CURRENT(MA)	DC 24=850 120=156 240=84
CONSUMPTION(W)	DC 24=20.4 120=18.6 240=18.8
LUMINANCE(LM)	CW=1543 WW=1307
IK	09

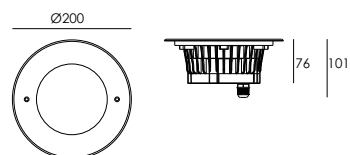


WATER PROOF SOLUTION




- Water-Stopper(Included)**
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

SLEEVE Option1

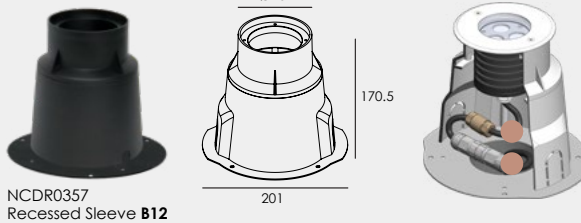


NCDR0357
Recessed Sleeve **B12**


Option2

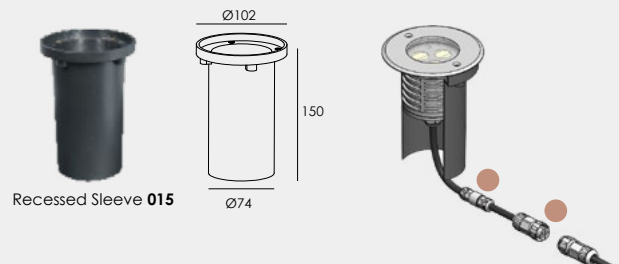

Recessed Sleeve **015**

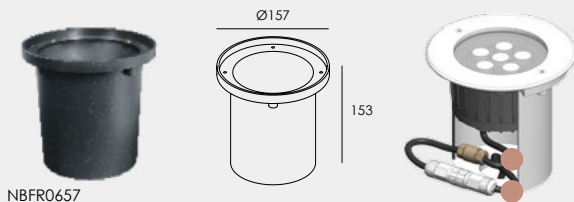

NBFR0657
Recessed Sleeve **016**

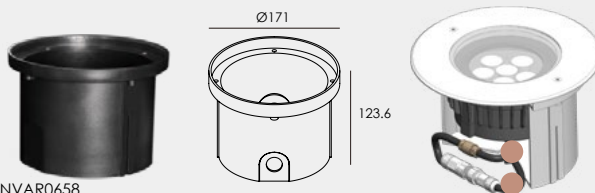

NVAR0658
Recessed Sleeve **057**

HOUSING	12# Die-casting aluminum dark grey powder coated T=60-80µm
FRONT RING	Hard chromeplated Stainless steel SUS 316L#
LIGHT WINDOW	Tempered step glass.T=8mm
CABLE GLAND	NCDR0357: IP68 PG-9 PA66 NBFR0657, NVAR0658: IP68 PG-11 PA66
LED	NCDR0357, NBFR0657: OSRAM NVAR0658: NICHIA
PCB	Excellent heat conductivity aluminum coefficient of heat Conductivity≥2.0w/mk
LED DRIVER	Constant Voltage Input, Constant Current Output
LENS	OPTICS Reflector efficiency≥85%
OPERATING TEMPERATURE	-20°C~50°C
POWER CABLE	Outside of luminaire NCDR0357: 12V/24V: H05RN-F 2×1.0mm², L=0.5m 120V/240V: H05RN-F 3×1.0mm², L=0.5m NBFR0657, NVAR0658: 2V/24V: H07RN-F 2×1.0mm², L=0.5m 120V/240V: H07RN-F 3×1.0mm², L=0.5m
RECESSED SLEEVE MATERIAL	PC/ABS ALLOYS
GLASS PRESSURE CAPACITY	NCDR0357: 2,578kgs NBFR0657: 2,274kgs NVAR0658: 3,489kgs
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized
IP	IP67

OPTICS Referenced Degree(°)91/2

	FC02	45°/35°
	FC04	45°/35°