



ALUMINIUM BULKHEAD Series


DIY Design

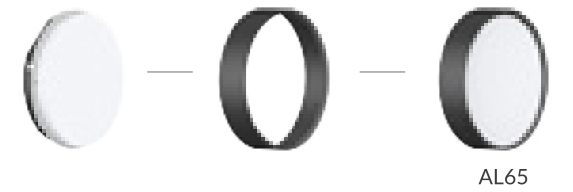

AL65

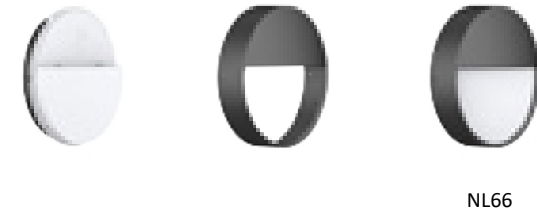

NL66

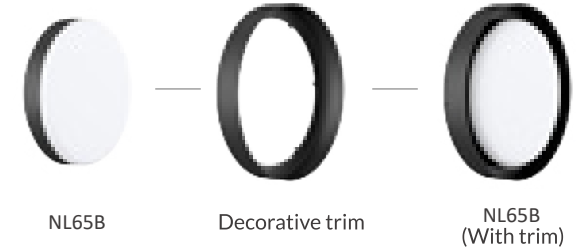



NL65B

Decorative trim

NL65B
(With trim)



NL65D

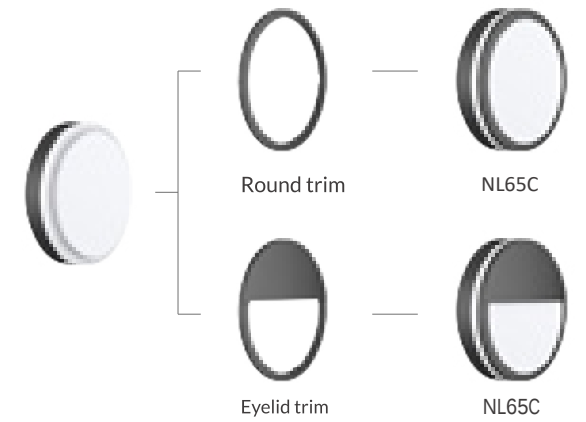

Round trim


NL65C

Eyelid trim

NL65C

FEATURES


- High protection level, IP65 IK08 (NL65D IK06).
- High lumen efficiency, 100-110lm/W (NL65D 90lm/W).
- Interchangeable CCT (3000K+4000K+5700K) with slide switch.
- Function: adjustable sensor, interchangeable CCT, emergency.

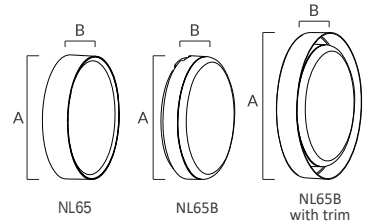

NL65

NL65B

NL65B
with trim

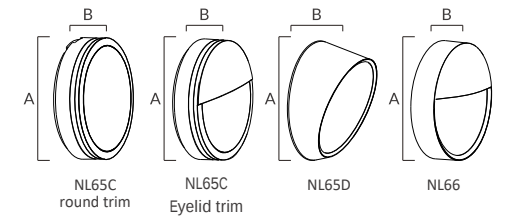

NL65C
round trim

NL65C
eyelid trim

NL65D

NL66

Code	Size(AxBmm)	Watt	Lumen(±5%)	Sensor	Emergency	Beam Angle
NL65-10	Ø250x58	12W	1250lm	NO	YES	110°
		18W	1850lm			
NL65B-10	Ø251x64	12W	1420lm	YES	YES	120°
		18W	2120lm			
NL65B-10 with trim	Ø300x64	12W	1400lm	NO	NO	120°
		18W	2070lm			
NL65C-10 round trim	Ø251x75	12W	1030lm	NO	YES	120°
		18W	1530lm			
NL65C-10 Eyelid trim	Ø251x76	12W	720lm	NO	YES	120°
		18W	970lm			
NL65D-10-15W	Ø251x116	15W	1400lm	YES	NO	110°
NL66-10-12W	Ø250x74	12W	1100lm	NO	YES	110°