



Conventional



On/off switch


Sensor function



TECHNICAL

Materials of Optics	PC
Materials of Housing	PC
Light Source	SMD (SDCM≤3)
Color Temperature	3000K/ 4000K/ 5000K/5700K
Luminous Efficiency@4000K	120m/w
CRI	≥80
Beam Angle(°)	150°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL 9016

OPTICS

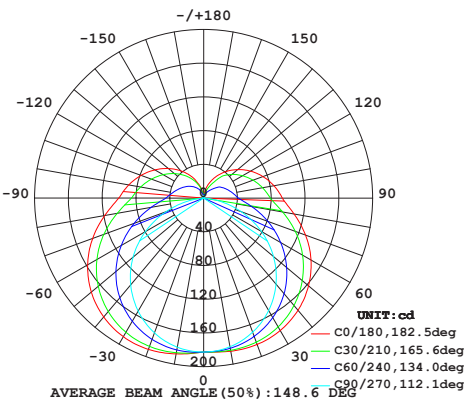


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	Microwave sensor
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM13-480-8W	8W	AC200-240V	480x61x77.5	1010lm	0.45	12PCS
NM13-600-10W	10W	AC200-240V	600x61x77.5	1270lm	0.62	12PCS
NM13-900-15W	15W	AC200-240V	900x61x77.5	1900lm	0.82	12PCS

NM13 | MODULAR DESIGN WITH
ADJUSTABLE SENSOR