



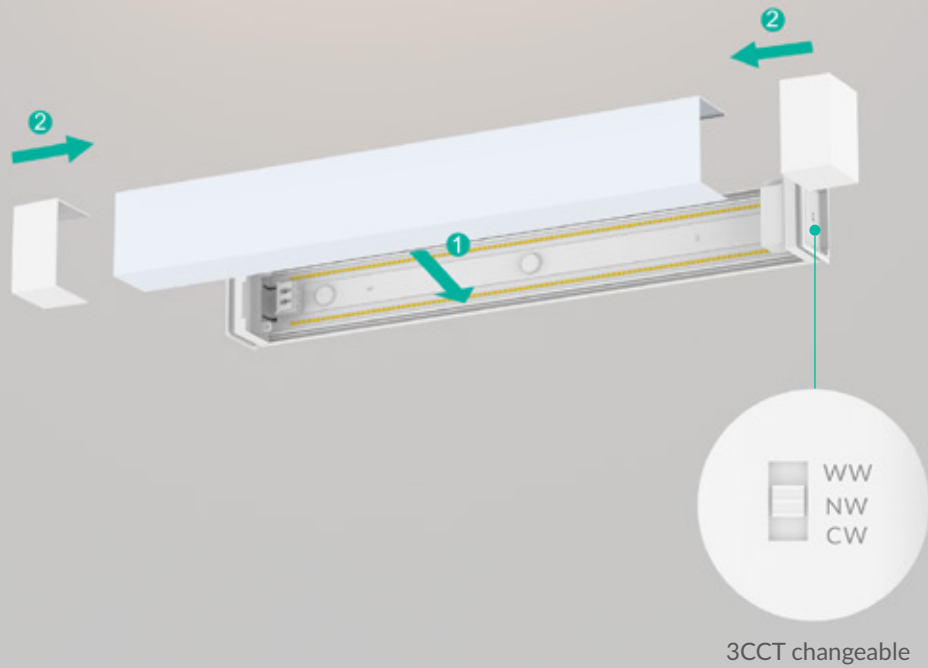

NM15


EASY ASSEMBLY WITH ADJUSTABLE SENSOR

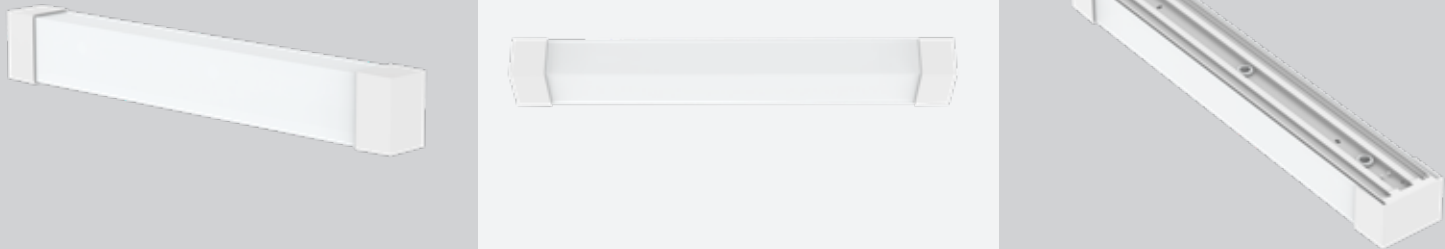

TECHNICAL

OPTICS


Materials of Optics	PC
Materials of Housing	PC/Aluminium
Light Source	SMD (SDCM≤3)
Color Temperature	3000K/ 4000K/ 5700K
Luminous Efficiency@4000K	120m/w
CRI	≥80
Beam Angle(°)	140°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL 9016

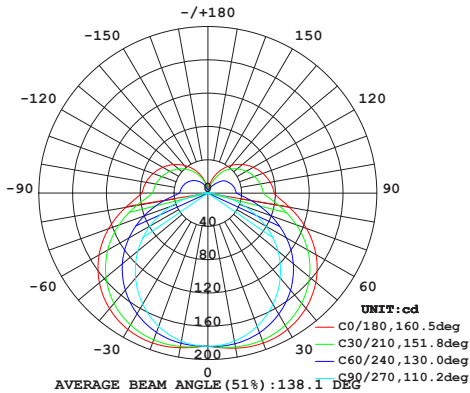

FEATURES & BENEFITS

INSTALLATION & ACCESSORIES

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	Microwave sensor
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

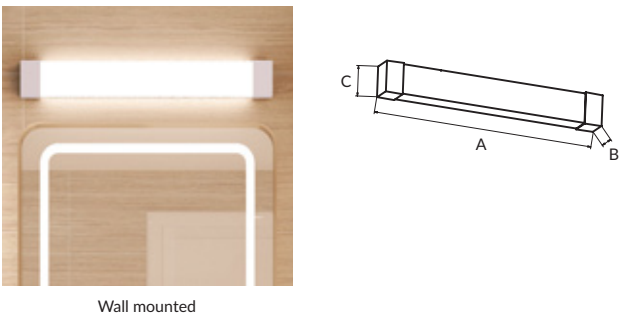

DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM15-450-8W	8W	AC200-240V	450x58x85	880lm	0.58	12PCS
NM15-600-10W	10W	AC200-240V	600x58x85	1200lm	0.71	12PCS