

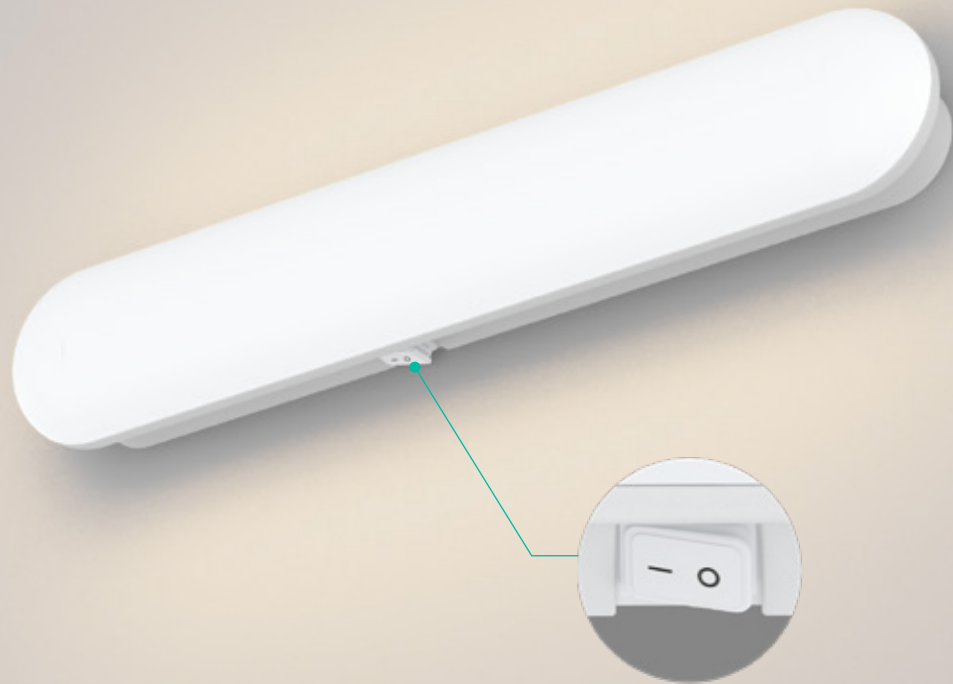


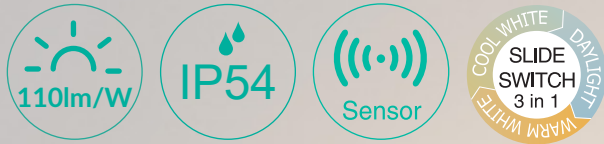

On-off switch


NM17

CURVED FACE DESIGN WITH
ADJUSTABLE SENSOR FUNCTION

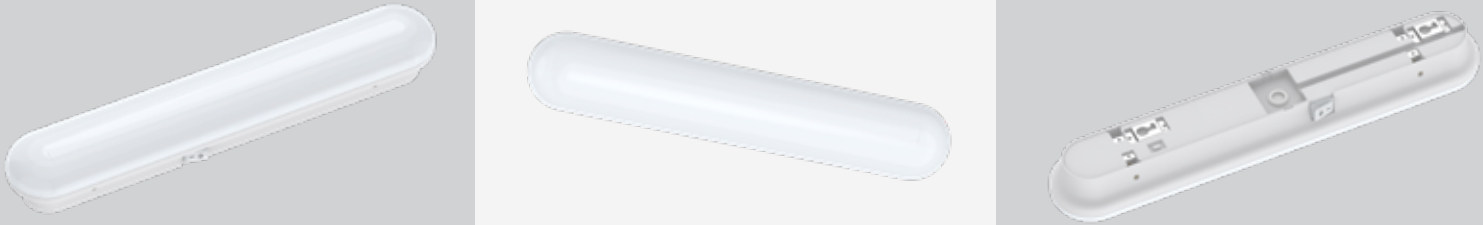

TECHNICALOPTICS

Materials of Optics	PC
Materials of Housing	PC
Light Source	SMD (SDCM≤3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	110m/w
CRI	≥80
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016

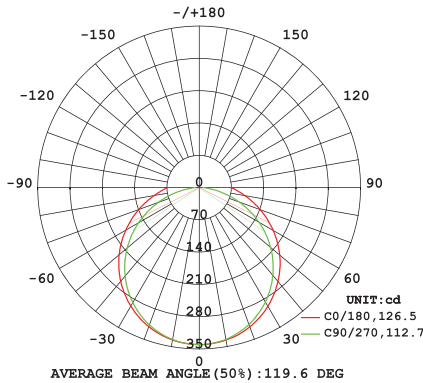


FEATURES & BENEFITSINSTALLATION & ACCESSORIES

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	Microwave sensor
Ingress Protection (IP Rating)	IP54
Impact Resistance (IK Rating)	IK07
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM17-450-10W	10W	AC200-240V	450x80x61	1100lm	0.78	12PCS
NM17-450-13W	13W	AC200-240V	450x80x61	1420lm	0.78	12PCS