




# NL91 Bulkhead




NL91 is with multiple shapes design, including circular, semicircle, square and oval. Adopt high lumen SMD LED and lighter weight fire-rated material which can ensure better heat resistance and be with corrosion resistance. Wall mounted and surface mounted available. The base and shade are detachable which make easier maintenance and installation. Remote sensor control for 15W &25W .

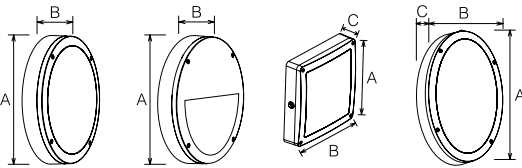


| Code                   | Watt | Size(AxBxCmm) | Lumen(±5%) | N.W/pc(kgs) | Q'ty/CTN |
|------------------------|------|---------------|------------|-------------|----------|
| NL91-11-12W-Circular   | 12W  | Ø275x59       | 1250lm     | 0.76        | 12PCS    |
| NL91-11-18W-Circular   | 18W  | Ø275x59       | 1780lm     | 0.76        | 12PCS    |
| NL91-11-25W-Circular   | 25W  | Ø275x59       | 2450lm     | 0.76        | 12PCS    |
| NL91-14-25W-Circular   | 25W  | Ø350x59       | 2450lm     | 1.19        | 6PCS     |
| NL91-14-30W-Circular   | 30W  | Ø350x59       | 2850lm     | 1.19        | 6PCS     |
| NL91-11-12W-Semicircle | 12W  | Ø275x59       | 1150lm     | 0.77        | 12PCS    |
| NL91-11-18W-Semicircle | 18W  | Ø275x59       | 1650lm     | 0.77        | 12PCS    |
| NL91-10-12W-Square     | 12W  | 242x242x59    | 1250lm     | 0.72        | 12PCS    |
| NL91-10-18W-Square     | 18W  | 242x242x59    | 1780lm     | 0.72        | 12PCS    |
| NL91-12-12W-Oval       | 12W  | 320x230x60    | 1250lm     | 0.78        | 12PCS    |
| NL91-12-18W-Oval       | 18W  | 320x230x60    | 1780lm     | 0.78        | 12PCS    |
| NL91-12-25W-Oval       | 25W  | 320x230x60    | 2450lm     | 0.78        | 12PCS    |

CCT 3000K 4000K 5000K 5700K

Finish White Black

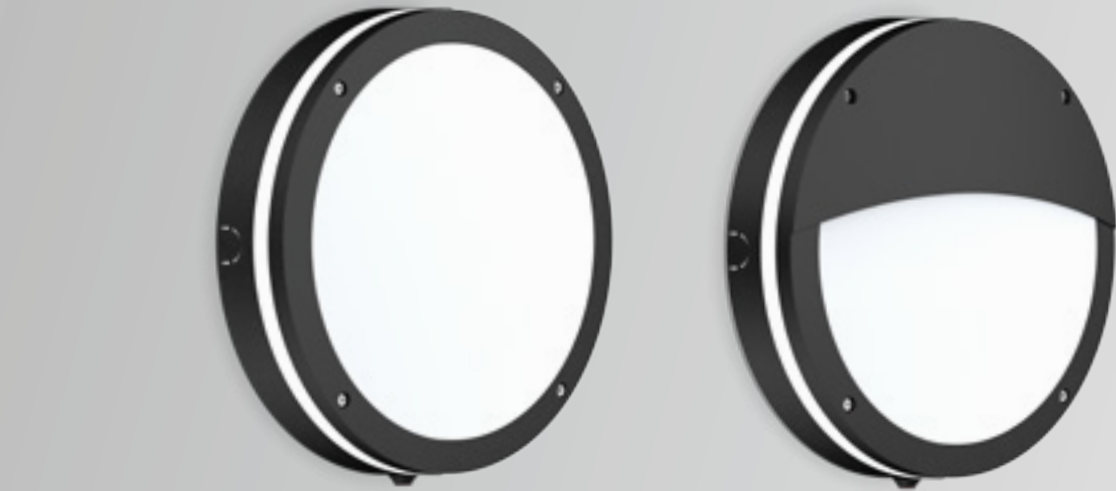

# NL91E Bulkhead



NL91E LED ceiling light with modular design which adopts high lumen SMD LED, fire-rated material. It has a wide lighting area with down lighting and side lighting. IP65 and IK10 are suitable for outdoor application. Multiple functions: interchangeable CCT and power, adjustable sensor, emergency. And DALI/0-10V/Triac dimmable are available.



| Code                     | Watt | Size(AxBmm) | Lumen(±5%) | N.W/pc(kgs) | Q'ty/CTN |
|--------------------------|------|-------------|------------|-------------|----------|
| NL91E-11-12W(Circular)   | 15W  | Ø275x67     | 1150lm     | 0.92        | 12PCS    |
| NL91E-11-18W(Circular)   | 18W  | Ø275x67     | 1650lm     | 0.92        | 12PCS    |
| NL91E-11-25W(Circular)   | 25W  | Ø275x67     | 2250lm     | 0.92        | 12PCS    |
| NL91E-11-12W(Semicircle) | 12W  | Ø275x68     | 750lm      | 0.95        | 12PCS    |
| NL91E-11-18W(Semicircle) | 18W  | Ø275x68     | 1100lm     | 0.95        | 12PCS    |
| NL91E-11-25W(Semicircle) | 25W  | Ø275x68     | 1550lm     | 0.95        | 12PCS    |

CCT 3000K 4000K 5000K 5700K

Finish White Black

