





3CCT changeable




90°

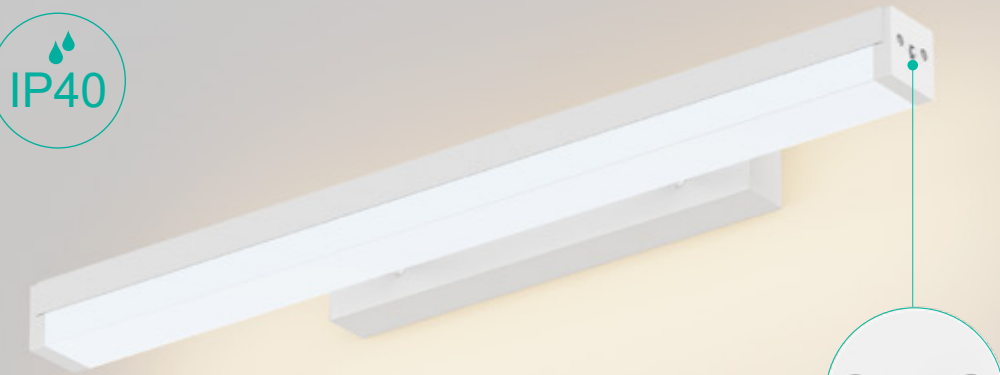

White



Chromed



Black



Brush Nickel

NM18


ROTATING ANGLE SQUARE MIRROR LIGHT



TECHNICAL

Materials of Optics	PC
Materials of Housing	AL+PC
Light Source	SMD (SDCM≤3)
Color Temperature	3000K/ 4000K/ 5000K/5700K
Luminous Efficiency@4000K	110m/w
CRI	≥80
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL 9016


OPTICS

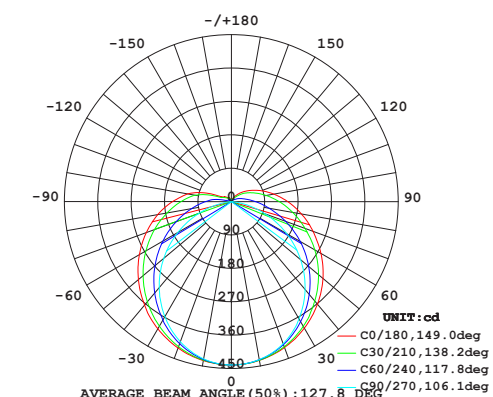


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP40
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM18-580-10W	10W	AC100-240V	860x50x111	1150lm	0.74	12PCS
NM18-860-15W	15W	AC100-240V	860x50x111	1950lm	0.96	12PCS
NM18-1140-20W	20W	AC100-240V	1140x50x111	2430lm	1.18	12PCS