



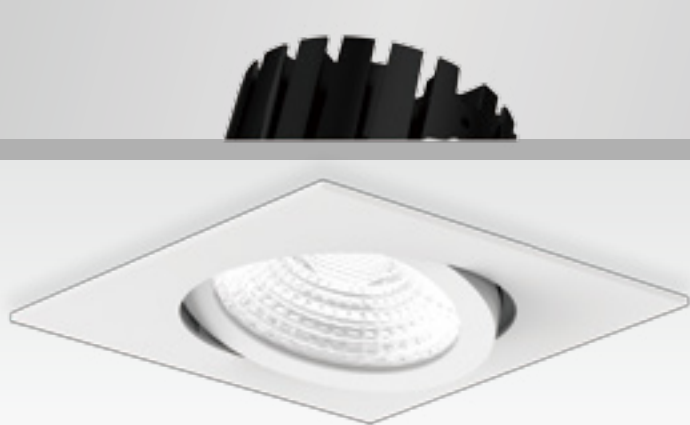

NC104 Downlight




NC104 square slimline IP65 rotatable downlight adopts brand CREE COB, anti-glare lens and ADC12 aluminum heatsink. External driver is exchangeable through quick connector between non-dimmable driver and Triac dimmable driver.

-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NC104A-2.5-5W	5W	80x80x30	Ø68-72	530lm	0.22	50PCS
NC104A-2.5-8W	8W	80x80x30	Ø68-72	815lm	0.22	50PCS
NC104B-2.5-10W	10W	90x90x39	Ø75-80	1000lm	0.26	50PCS
NC104-3-10W	10W	110x110x50	Ø90-95	1000lm	0.35	30PCS
NC104-3-13W	13W	110x110x50	Ø90-95	1350lm	0.35	30PCS



ND104 Downlight



ND104 square slimline IP65 fxd downlight adopts brand CREE COB, anti-glare lens and ADC12 aluminum heatsink. External driver is exchangeable through quick connector between non-dimmable driver and Triac dimmable driver.

-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ND104A-2.5-5W	5W	80x80x40	Ø68-72	530lm	0.22	50PCS
ND104A-2.5-8W	8W	80x80x40	Ø68-72	815lm	0.22	50PCS
ND104B-2.5-10W	10W	90x90x49	Ø75-80	1000lm	0.28	50PCS
ND104-3-10W	10W	110x110x64	Ø90-95	1000lm	0.39	30PCS
ND104-3-13W	13W	110x110x64	Ø90-95	1350lm	0.39	30PCS