




EU socket support
16A electrical device



White




Sliver



Black

NM25


PULL SWITCH MIRROR LIGHT WITH
SOCKET

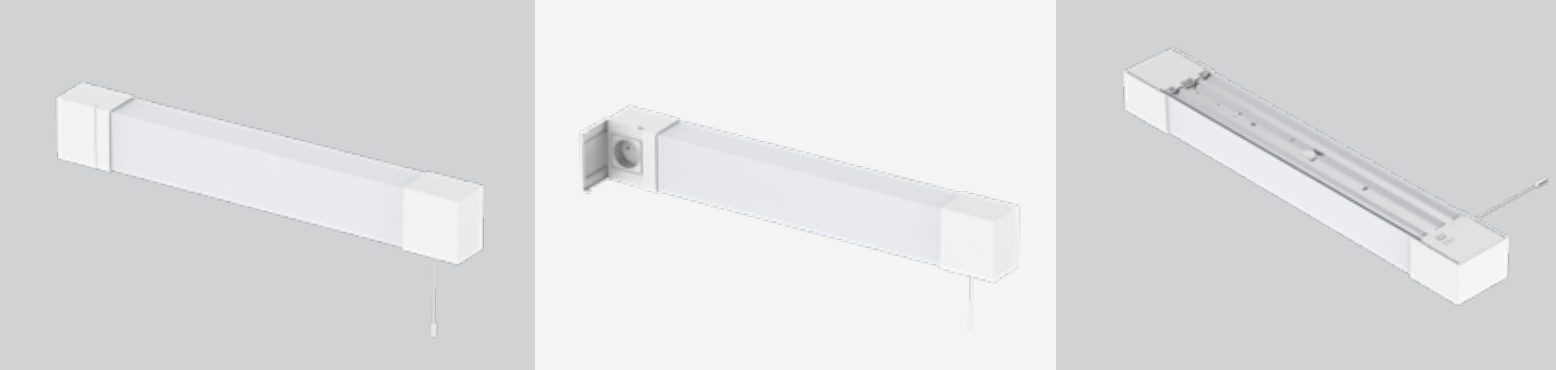

TECHNICAL

Materials of Optics	PC
Materials of Housing	PC+AL6063
Light Source	SMD (SDCM≤3)
Color Temperature	3000K/ 4000K/ 5700K
Luminous Efficiency@4000K	100m/w
CRI	≥80
Beam Angle(°)	140°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL 9016 /Silver RAL9006


OPTICS

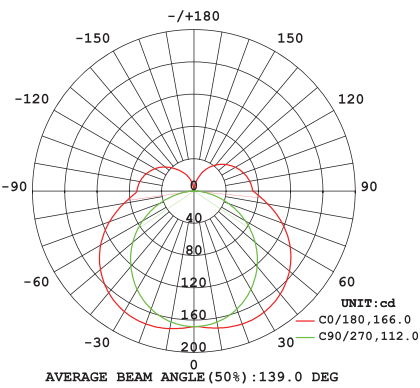

FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	-
Power Factor (PF)	0.8/0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES



Wall mounted

DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM25-600-8W	8W	AC220-240V	599x57x85	850lm	0.74	12PCS
NM25-900-10W	10W	AC220-240V	899x57x85	1150lm	1.02	12PCS