



PIR Sensor



UK socket



German socket



French socket



AU socket



White



Chromed


NM26 | IP44 MIRROR LIGHT WITH SOCKET DESIGN



TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD (SDCM<3)
Color Temperature	3000K/ 4000K/ 5000K/5700K
Luminous Efficiency@4000K	140lm/w
CRI	≥80
Beam Angle(°)	175°×110°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016/Chromed

OPTICS

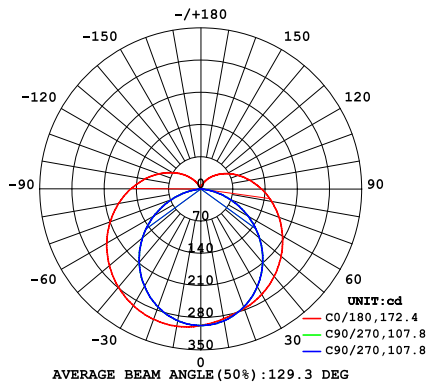


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	Triac
Functions	PIR Sensor
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM26A-450-5W	5W	AC220-240	450x80x80	700lm	0.63	6PCS
NM26A-555-8W	8W	AC220-240	555x80x80	1200lm	0.74	6PCS
NM26A-555-10W	10W	AC220-240	555x80x80	1400lm	0.74	6PCS
NM26A-855-8W	8W	AC220-240	855x80x80	1200lm	1.05	6PCS
NM26A-855-12W	12W	AC220-240	855x80x80	1700lm	1.05	6PCS
NM26B-495-5W	5W	AC220-240	495x80x80	700lm	0.75	6PCS
NM26B-600-8W	8W	AC220-240	600x80x80	1200lm	0.85	6PCS
NM26B-600-10W	10W	AC220-240	600x80x80	1400lm	0.85	6PCS
NM26B-900-8W	8W	AC220-240	900x80x80	1200lm	1.20	6PCS
NM26B-900-12W	12W	AC220-240	900x80x80	1700lm	1.20	6PCS

INSTALLATION & ACCESSORIES



Wall mounted

