



Surface mount / Pendant




Wall mounted

160°×110°



White



Black

NM27


SCREWLESS AND CLIPS SNAP
DESIGN



TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium+PC
Light Source	SMD (SDCM≤3)
Color Temperature	3000K/ 4000K/ 5000K/5700K
Luminous Efficiency@4000K	120m/w
CRI	≥80
Beam Angle(°)	160°×110°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL 9016 / Black RAL 9005

OPTICS

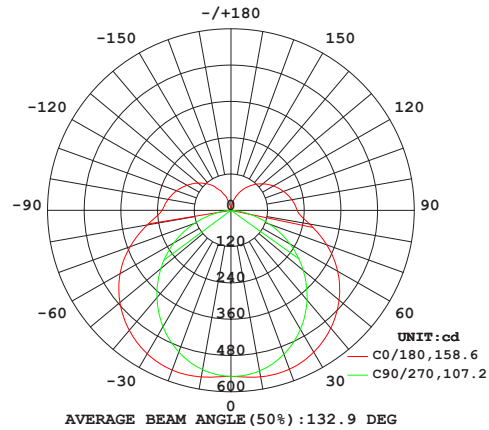

FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	DALI
Functions	Microwave sensor
Ingress Protection (IP Rating)	IP40/IP44
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES




Wall mounted



Pendant



Surface mount



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM27-600-12W	12W	AC220-240V	600x72x46	1600lm	1.00	6PCS
NM27-900-20W	20W	AC220-240V	900x72x46	2600lm	1.30	6PCS
NM27-1200-32W	32W	AC220-240V	1200x72x46	4000lm	1.60	6PCS