



White



Chromed

NM29


LED MIRROR LIGHT
(120LM/W)



TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	SMD (SDCM<3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	120lm/W
CRI	≥80
Beam Angle(°)	110°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016 / Chromed


OPTICS

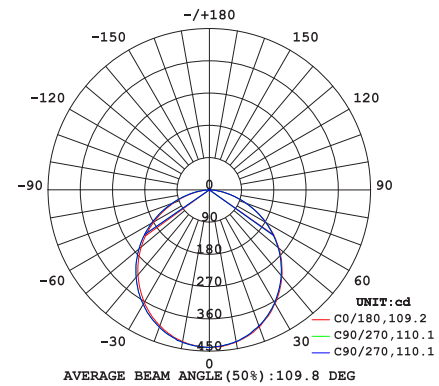


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	IK03
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM29-450-6W	6W	AC220-240	450x66x72	720lm	0.54	12PCS
NM29-580-10W	10W	AC220-240	580x66x72	1200lm	0.70	12PCS
NM29-860-15W	15W	AC220-240	860x66x72	1850lm	1.04	12PCS