




LED BULKHEAD


NL162B/163B |

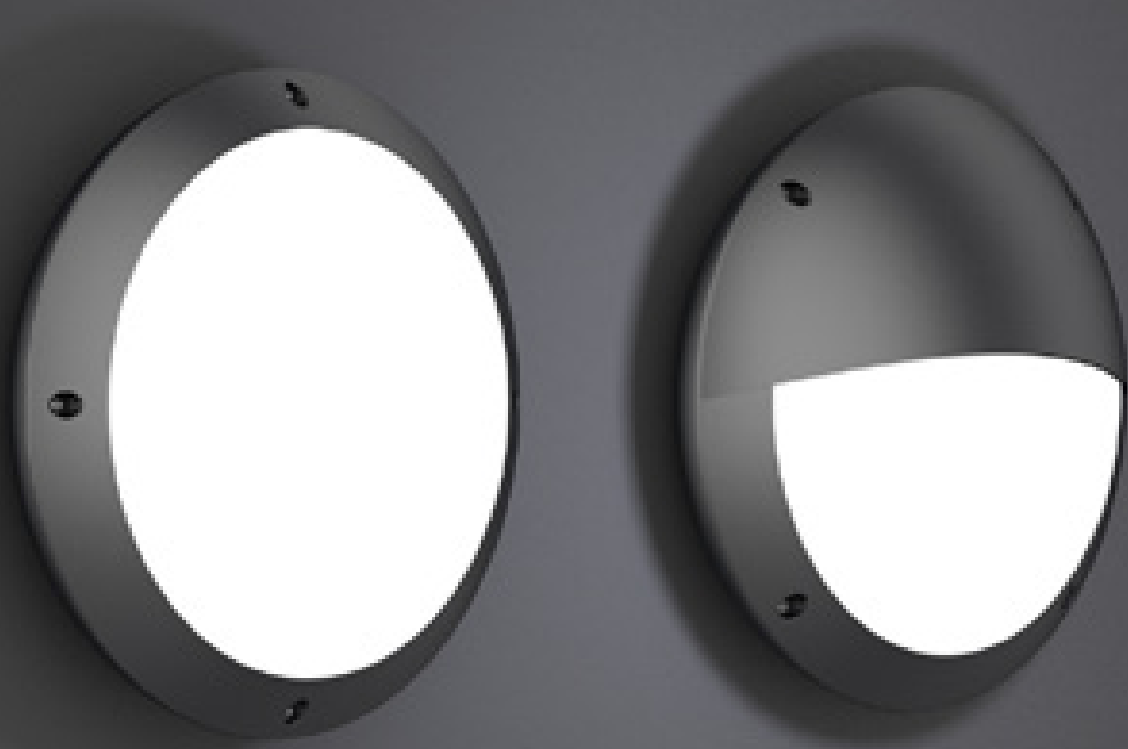

TECHNICAL

Materials of Optics	PC
Materials of Housing	ABS
Light Source	SMD (SDCM<6)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	110lm/W
CRI	≥80
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL 9016 / Black RAL 9005


OPTICS

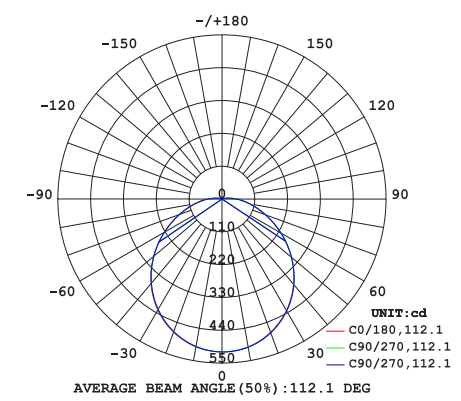

FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	Adjustable sensor
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES

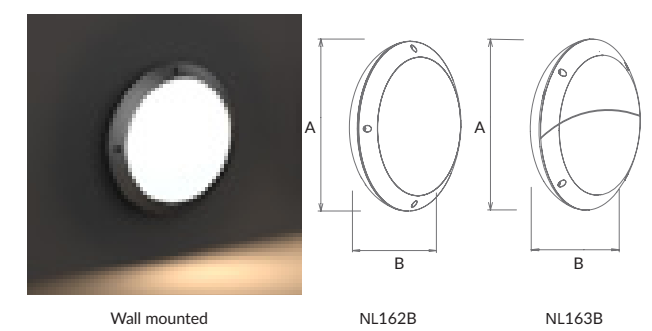

DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL162B-12-12W	12W	AC220-240V	Ø300x95	1320lm	0.83	6PCS
NL162B-12-14W	14W	AC220-240V	Ø300x95	1540lm	0.83	6PCS
NL162B-12-18W	18W	AC220-240V	Ø300x95	1840lm	0.83	6PCS
NL163B-12-12W	12W	AC220-240V	Ø300x97	1050lm	0.85	6PCS
NL163B-12-14W	14W	AC220-240V	Ø300x97	1190lm	0.85	6PCS
NL163B-12-18W	18W	AC220-240V	Ø300x97	1530lm	0.85	6PCS