




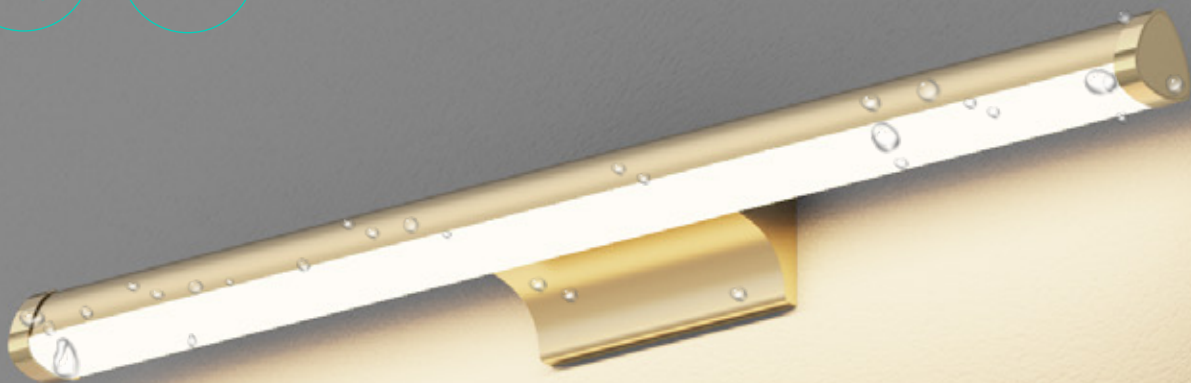

White




Golden



Silver


NM31 | SLIM AND REFINED LED MIRROR LIGHT

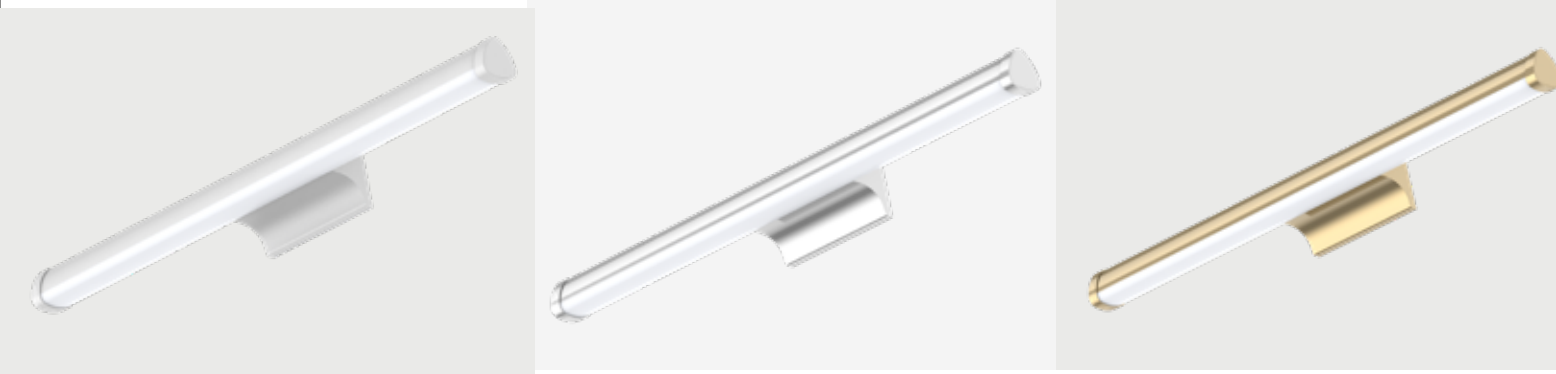

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	SMD (SDCM≤3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	125lm/w
CRI	≥80
Beam Angle(°)	110°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016 / Gloden RAL1001 / Silver RAL9006


OPTICS

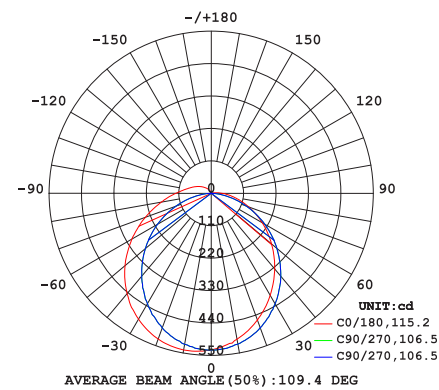


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP54
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM31-600-10W	10W	AC100-240V	600x61x81	1340lm	0.51	12PCS
NM31-900-15W	15W	AC100-240V	900x61x81	2140lm	0.61	12PCS