



A

Conventional

B

Sensor function

On-off press switch

B



AU socket



German socket



French socket



UK socket

NM32


INTEGRATED SENSOR MIRROR
LIGHT WITH SOCKET



TECHNICAL

Materials of Optics	PC
Materials of Housing	PC
Light Source	SMD (SDCM≤3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	100m/w
CRI	≥80
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016

OPTICS

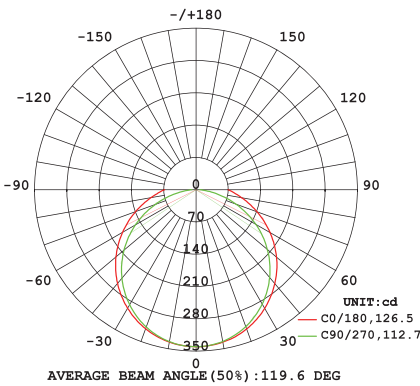


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	PIR sensor
Ingress Protection (IP Rating)	IP54
Impact Resistance (IK Rating)	IK04
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM32A-500-8W	8W	AC220-240V	409x60x55	890lm	0.48	12PCS
NM32A-800-12W	12W	AC220-240V	709x60x55	1370lm	0.76	12PCS
MN32A-1000-20W	20W	AC220-240V	909x60x55	2250lm	1.00	12PCS
NM32B-500-8W	8W	AC220-240V	500x60x55	890lm	0.62	12PCS
NM32B-800-12W	12W	AC220-240V	800x60x55	1370lm	0.90	12PCS
NM32B-1000-20W	20W	AC220-240V	1000x60x55	2250lm	1.15	12PCS