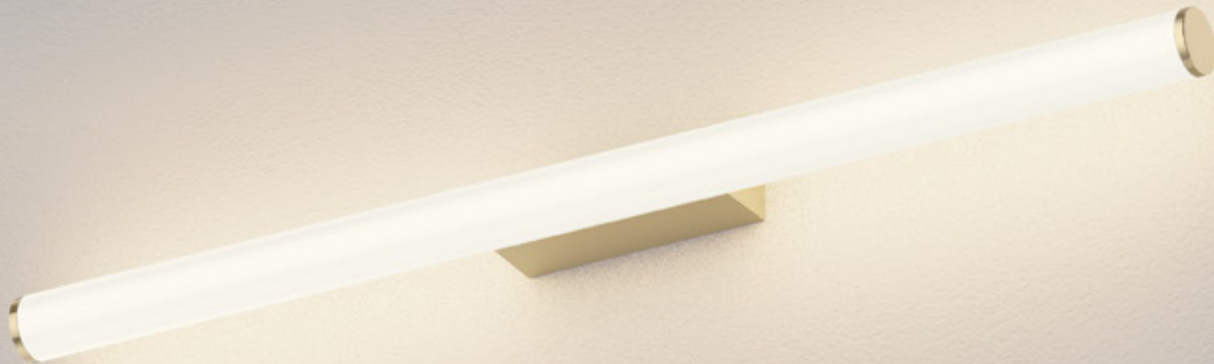


White

Chromed

Golden

NM34


LED MIRROR LIGHT
(130LM/W)



TECHNICAL

Materials of Optics	PC
Materials of Housing	PC
Light Source	SMD (SDCM<3)
Color Temperature	1-CCT 3000K/ 4000K/ 5000K/ 5700K 2-CCT: 2700K + 3000K / 3000K + 4000K
Luminous Efficiency@4000K	130lm/W
CRI	≥80
Beam Angle(°)	160°
UGR	-
Lifetime(hr)	50,000h
Product Finishing	White RAL9016 / Golden RAL1001 / Chromed

OPTICS

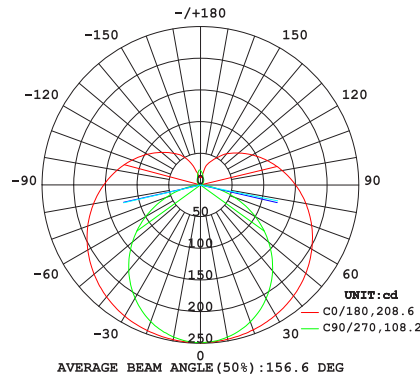


FEATURES & BENEFITS

CCT Selection DIP Switch	3-CCT
LED Driver	Built-in
Dimming Option	-
Functions	-
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	IK03
Power Factor (PF)	≥0.9
Certification	SAA/ RoHS/ CE

INSTALLATION & ACCESSORIES



Wall mounted



DATA SHEET

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBmm)	LUMEN(±5%)	N.W/pc(kgs)	Q'ty/CTN
NM34-450-6W	6W	AC220-240	450x80x46	830lm	0.49	12PCS
NM34-600-8W	8W	AC220-240	600x80x46	1200lm	0.59	12PCS
NM34-600-10W	10W	AC220-240	600x80x46	1400lm	0.59	12PCS
NM34-900-12W	12W	AC220-240	900x80x46	1650lm	0.80	12PCS
NM34-900-15W	15W	AC220-240	900x80x46	2100lm	0.80	12PCS