




# NL-CC Panel light

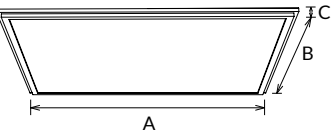


NL-CC panel is 14.3mm thickness panel with external driver, adopts high lumen LED chips with CRI>80, PMMA LGP produces uniform and comfortable light. Stronger frame makes better heat dissipation than common panels. The lighting area fts seamlessly with the ceiling. Recessed installation with clips make it suitable for more kinds of ceiling perfectly.

- 120°
 IP40
 UGR<19
- DIM
 DALI
 0-10V
- AC 220-240V
 PF≥0.9
 CRI≥80
 TP(a)
 TP(b)
- SAA
 RoHS
 CE


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL6060-33W-CC	33W	595x595x14.3	580x580	3530lm	2.50	5PCS
NL6060-42W-CC	42W	595x595x14.3	580x580	4370lm	2.50	5PCS
NL30120-33W-CC	33W	1195x295x14.3	1180x280	3400lm	2.65	5PCS
NL30120-42W-CC	42W	1195x295x14.3	1180x280	4210lm	2.65	5PCS

CCT 3000K 4000K 5000K 5700K

Finish White

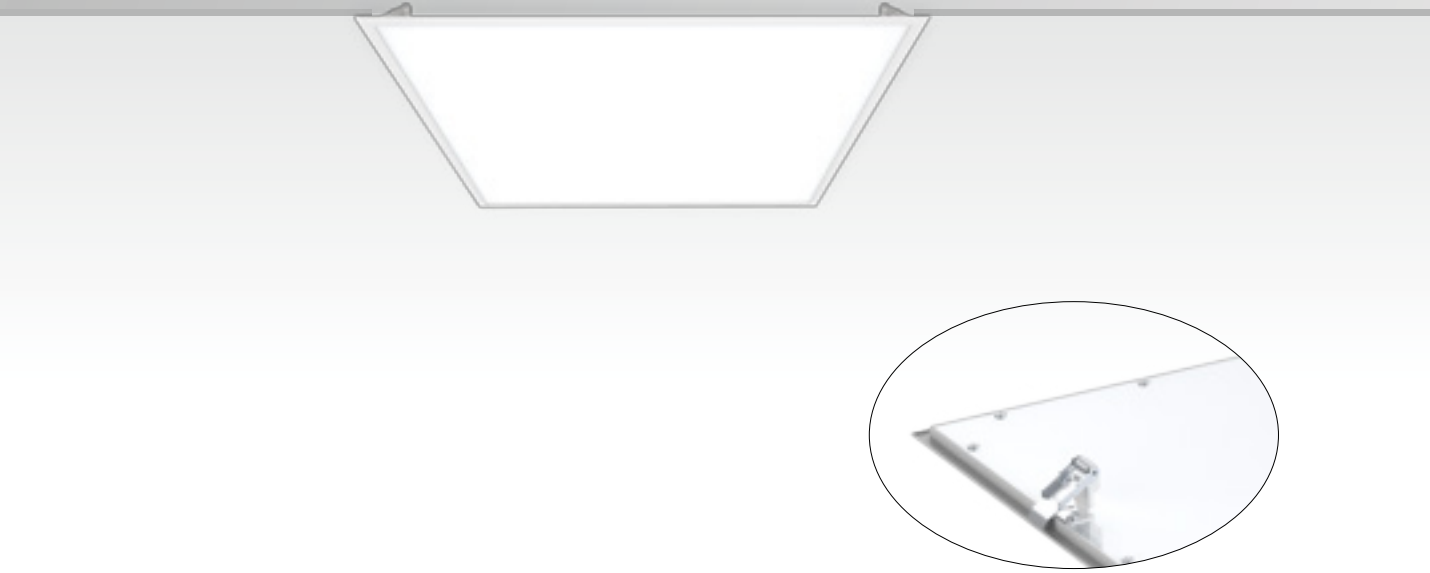

# NL-CD Panel light

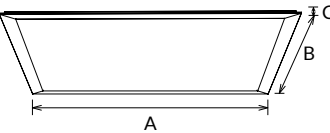

NL-CD panel light is 8.5mm thickness frame with fxed spring design panel light with external driver, adopts high lumen LED chips with CRI>80, special frame design provides excellent thermal management. Recessed installation with clips makes it suitable for more kinds of ceiling.

- 120°
 IP40
 UGR<19
- DIM
 DALI
 0-10V
- AC 220-240V
 PF≥0.9
 CRI≥80
 TP(a)
 TP(b)
- SAA
 RoHS
 CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL6060-33W-CD	33W	595x595x35.5	580x580	3460lm	2.35	5PCS
NL30120-33W-CD	33W	1195x295x35.5	1180x280	3400lm	2.40	5PCS

CCT 3000K 4000K 5000K 5700K

Finish White