




ND115A/B Downlight



ND115A/B SMD compact and neat surface mounted downlight series with 3 CCT in 1 lamp optional, slide switch for color selection are good for commercial project requirement. An IP54-rated version for indoor use. 60° beam angle with specular reflector can reach UGR<19.

Reflector




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ND115-4-13W	13W	Ø143x112	1460lm	0.39	12PCS
ND115-6-18W	18W	Ø170x124	1890lm	0.49	12PCS
ND115-8-25W	25W	Ø213x129	2930lm	0.80	12PCS

CCT — 3000K 4000K 5000K 5700K Finish — White Black Silver




NP05A/B Downlight



NP05A/B SMD pendant downlight series with 3 CCT in 1 lamp optional, slide switch for color selection is good for commercial project requirement. 60° beam angle with specular reflector can reach UGR<19.

Reflector

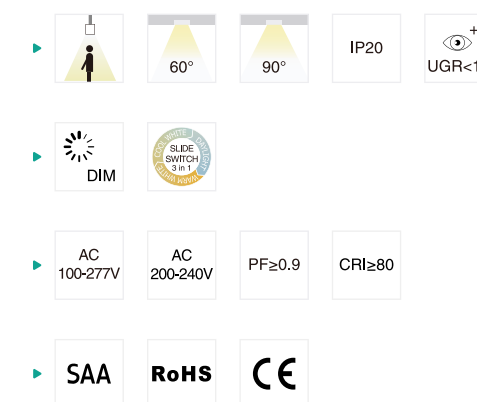

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NP05-4-13W	13W	Ø143x110	1460lm	0.65	12PCS
NP05-6-18W	18W	Ø170x123	1890lm	0.83	12PCS
NP05-8-25W	25W	Ø213x127	2930lm	1.06	12PCS

CCT — 3000K 4000K 5000K 5700K Finish — White Black Silver