


Material:

- 1 PC diffuser
- 2 ADC12 Aluminum lamp body

Ultra slim design

3 13mm thickness



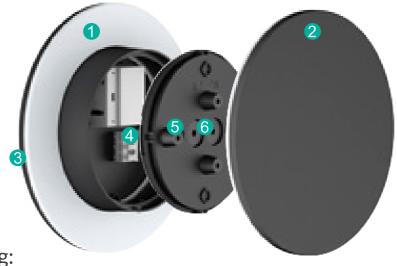

- Wiring and Installing:
- 4 Quick terminal block
- **5** Use spacer kit if necessary
- 6 Double cable entry holes



FEATURES


- Backward lighting design for a soft lighting atmosphere.
- ADC12 aluminum offers a great heat dissipation.
- Interchangeable CCT(3000K+4000K+5700K) with slide switch.
- IP65 for the whole lamp, suitable for both indoor and outdoor using.
- Internal flicker free driver.
- Triac dim available.











Code	Size(AxBxCmm)	Watt	Lumen(±5%)	Beam Angle
NL105-8W	Ø160x50	8W	620lm	
NL105-15W	Ø250x50	15W	1220lm	90°
NL105-8W-C3	Ø160x50	8W	640lm	90"
NL105-15W-C3	Ø250x50	15W	1260lm	